


RESIDUMETER II INSTRUMENTS FOR MEASURING MAGNETISM MODEL EMUD2K

"PROVIDING ELECTROMAGNETIC TOOLS FOR INDUSTRY"

**A STANDARD FOR MEASURING THE STRENGTH AND DIRECTION OF DC MAGNETIC FIELDS.
ESTABLISHED BY ELECTRO-MATIC PRODUCTS CO. IN 1954.**


GENERAL INFORMATION

LCD provides easy visibility of gauss measurement . Testing area is located bottom center-front, and must physically contact work piece for measurement to be taken.

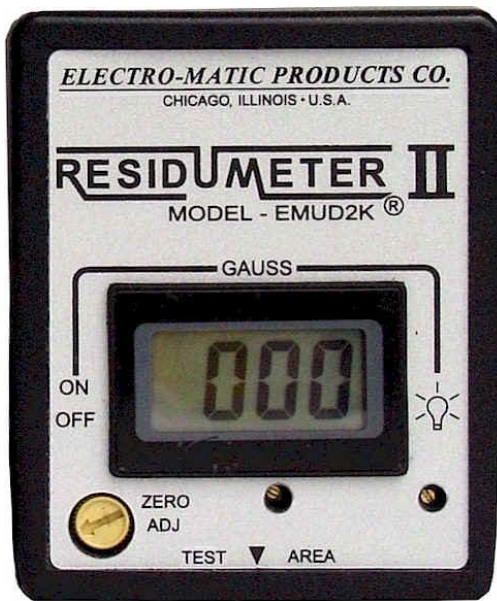

STANDARD FEATURES

- 3 ½ digit LCD [0.38" (9.75mm) digit height]
- ON-OFF slide switch
- Momentary-ON pushbutton LED backlight
- External zero adjustment dial and low battery indicator
- Circuit operates on a standard 9 volt alkaline battery (included).
- Hard plastic enclosure with removable belt clip
- Range is 0-1999 gauss north/south.
- Accuracy is within 2% of reading or 1 gauss, whichever is greater.
- Operating temperature 0° C to 40° C (32° F to 104° F).

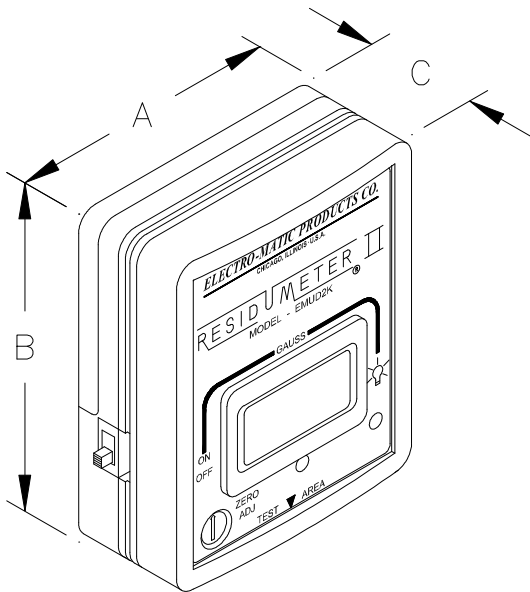

DIMENSIONS IN INCHES

A	B	C
2.5	3	1.25



ELECTRO-MATIC PRODUCTS CO.

2235 N. KNOX AVE., CHICAGO, IL 60639, U.S.A.
(773) 235-4010 • FAX (773) 235-7317
WWW.EM-CHICAGO.COM

A HIGH TECHNOLOGY COMPANY SINCE 1939